


Preset libraries

preset guide (EN)

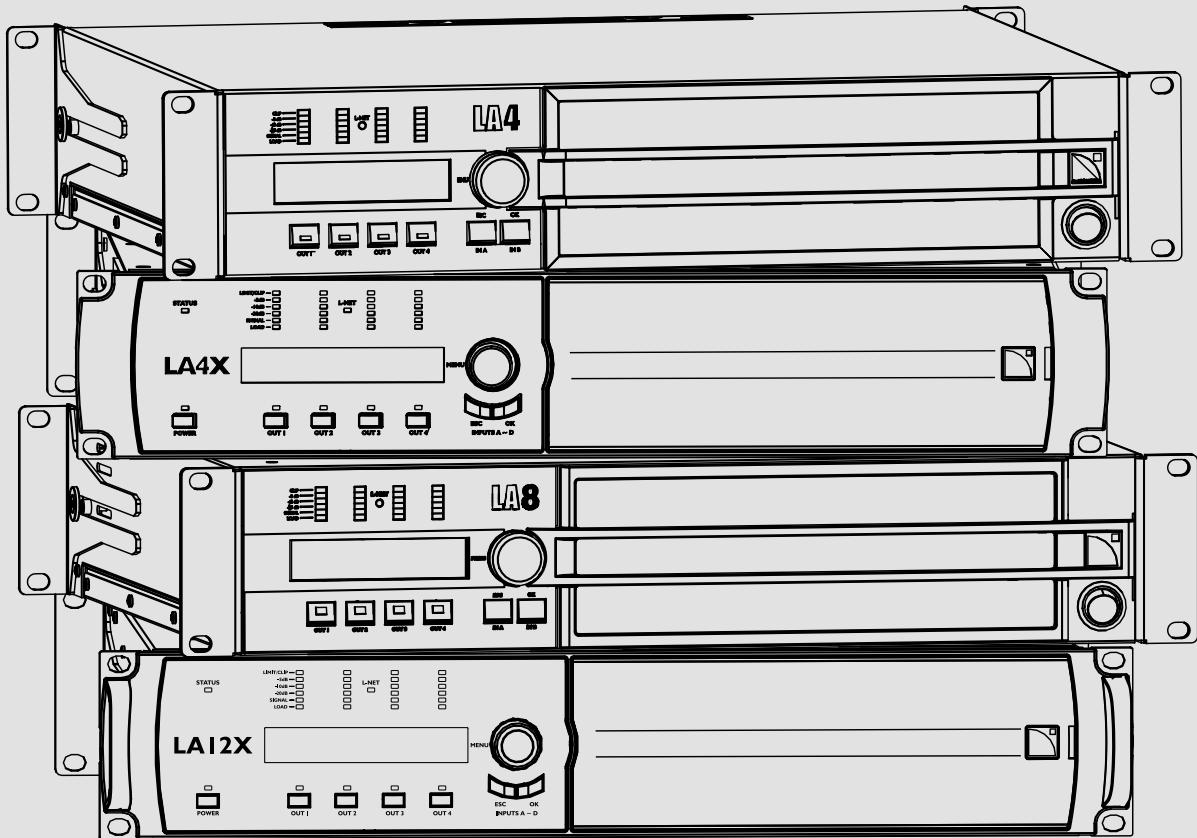

Document reference: Preset libraries preset guide (EN) version 7.1

Distribution date: April 7, 2016

© 2016 L-Acoustics. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or by any means without the express written consent of the publisher.

Contents

Introduction.....	5
Preset design.....	6
Onboard preset libraries.....	7
LA4 preset library.....	7
LA4X preset library.....	11
LA8 preset library.....	14
LA12X preset library.....	20
FLAT presets.....	23
Variable Curvature WST systems presets.....	24
K1.....	24
K2.....	26
Kudo.....	27
Kara.....	28
Kiva SB15m.....	29
Kiva Kilo.....	30
V-DOSC.....	32
dV-DOSC.....	34
Constant Curvature WST systems presets.....	36
ARCS II.....	36
ARCS Wide / ARCS Focus.....	37
ARCS.....	38
Coaxial loudspeaker enclosures presets.....	39
X15 HiQ.....	39
X12.....	41
X8.....	43
5XT.....	45
8XT, 12XTP, MTD108a, MTD112b and MTD115bP.....	46
12XTA, 115XT, 115XT HiQ and MTD115bA.....	47
Subwoofer loudspeaker enclosures presets.....	48
Pre-alignment delay values.....	50
Variable curvature WST systems.....	51
Constant curvature WST systems.....	58
Coaxial loudspeaker enclosures.....	60

Enclosure drive capacity per amplified controller.....	64
Enclosure drive capacity per LA4.....	64
Enclosure drive capacity per LA4X.....	65
Enclosure drive capacity per LA8.....	66
Enclosure drive capacity per LA12X.....	68

Introduction

The L-Acoustics amplified controllers are delivered with onboard firmware and preset library.

Presets of the onboard library can be loaded from the front panel of the amplified controller, or from the LA Network Manager software application, a management tool dedicated to the remote control and monitoring of a network of L-Acoustics amplified controllers.

LA Network Manager must be used for updating firmware on L-Acoustics amplified controllers. An up-to-date preset library is automatically installed with the firmware. Check the L-Acoustics website for the latest version of software, firmware and libraries.



Operating L-Acoustics amplified controllers

Refer to the LA4, LA4X, LA8, LA12X, LA-RAK and LA-RAK II user manuals.

Installing LA Network Manager

Download the LA amplified controller release pack and refer to the Readme file.

Updating firmware on an L-Acoustics amplified controller

Refer to the LA Network Manager video tutorial, accessible from the Help menu of the software.

This version of the preset guide describes the LA4, LA4X, LA8 and LA12X preset libraries version 5.5(.1).

Preset design

Gain structure

The gains of all L-Acoustics factory presets are calibrated with a reference pink noise signal, representative of most demanding musical programs. The reference input level is 0 dBu with analog audio source or -22 dBFS with digital audio source. When feeding L-Acoustics amplified controllers at this input level, L-Acoustics loudspeaker enclosures provide the sound engineer with 8 dB of headroom, except for the ones of smaller format — MTD108a, 5XT, 8XT, Kiva, SB15m and Kilo — calibrated for 4 dB of headroom.

This gain structure facilitates managing the power resources of L-Acoustics systems when using various types of enclosures of the same format. With default output gain settings (0 dB), all enclosures will reach their limits for the same input signal level. The only gain adjustment to apply is -4 dB for MTD108a, 5XT, 8XT, Kiva, SB15m or Kilo enclosures used along with L-Acoustics loudspeaker enclosures of bigger format.

Electro-acoustic coupling

Each recommended loudspeaker configuration provides a coherent sound source, by implementing a loudspeaker system in a specific deployment pattern and with defined factory presets.

L-Acoustics factory presets ensure the coupling between the different transducer sections, whether it is internal coupling as in active loudspeaker enclosures, or external coupling as when several loudspeaker enclosures are combined.

Users can adjust preset parameters on top of factory settings and for predefined channel sets.

Channel sets have been defined for the presets dedicated to active loudspeaker enclosures and to some specific loudspeaker configurations. A channel set maintains a coherent coupling by linking several output channels for the setting of routing, gain and delay parameters. For example, [LF HF] is a channel set for 2-way loudspeaker enclosure presets, and [SR SB SB SB] is a channel set for cardioid subwoofer presets.

The Presets Guide describes the recommended loudspeaker configurations for each system, with the corresponding factory presets and the main resulting acoustic properties.

When applicable, refer to the user manual of the related system for the limit between coupled and separated subwoofers.

For some loudspeaker enclosure combinations, it is necessary to adjust the delay values for time-alignment. Refer to section [Pre-alignement delay values](#) (p.50).

Frequency response contour

For the X Series coaxial loudspeaker enclosures, there are two distinct contours:

- the standard preset, for all applications except stage monitor applications
- the _MO preset, dedicated to stage monitor applications

For legacy coaxial loudspeaker enclosures (XT and MTD Series), there are three distinct contours:

- the _FR presets, for most of FOH applications
- the _FI presets, for spoken word, classical music, jazz, or fill systems
- the _MO presets, for half-space loading conditions, typically monitor applications

For current WST systems, there are one or two distinct contours:

- the main preset, ensuring a reference FOH contour to the line source with usual deployment parameters
- the _FI preset, dedicated to loudspeaker enclosures used as a fill system (for some systems only)

The oldest WST systems inherit from a legacy preset structure (_HI and _LO presets).

If necessary, users can adjust the sonic signature of L-Acoustics systems through the Contour EQ tools in LA Network Manager.

The Array Morphing tool provides two parameters, zoom factor and LF contour, that allow users to adjust the response of a WST system. At any reference listening distance and with any line source length, the engineer can obtain the sonic signature of a bigger, smaller, closer or further system, and can unify the sonic signature of multiple sources. Refer to the LA Network Manager tutorial and Array Morphing white paper for detailed information.

Onboard preset libraries

Each onboard preset library includes the L-Acoustics loudspeaker enclosures of which power requirements match the delivering capability of the corresponding amplified controller.

The LA4 preset library is restricted to loudspeaker enclosures requiring no more than 800 W into 8 Ω or 1000 W into 4 Ω.

The LA4X preset library is restricted to loudspeaker enclosures requiring no more than 1000 W into 8 Ω or 1000 W into 4 Ω.

The LA8 preset library is restricted to loudspeaker enclosures requiring no more than 1100 W into 8 Ω or 1800 W into 4 or 2.7 Ω.

The preset library covers all L-Acoustics loudspeaker enclosures.

LA4 preset library

The LA4 onboard preset library is stored in the factory memory locations 011 to 089 of the controller (the memory locations 001 to 010 are dedicated to the storage of presets modified by the user). Each preset family is described in the tables below, including the presets memory location number, name, and description.

LA4 Preset Library 5.5.(1)

KIVA

011	[KIVA]	Kiva, full range, FOH
012	[KIVA_FI]	Kiva, full range, fill

SB15KIVA

013	[KIVA_SB15]	Kiva & SB15m, X-OVER=100 Hz, full range, FOH
-----	-------------	--

KILOKIVA

014	[KIVA_KILO]	Kiva & Kilo, full range, X-OVER=100 Hz, FOH
-----	-------------	---

ARCS

015	[ARCS_LO]	ARCS, full range, LO contour
016	[ARCS_LO_60]	ARCS, HPF=60 Hz, LO contour
017	[ARCS_LO_100]	ARCS, HPF=100 Hz, LO contour
018	[ARCS_HI]	ARCS, full range, HI contour
019	[ARCS_HI_60]	ARCS, HPF=60 Hz, HI contour
020	[ARCS_HI_100]	ARCS, HPF=100 Hz, HI contour

ARCS_WF

021	[ARCS_WIFO]	ARCS Wide or ARCS Focus, full range, FOH
022	[ARCS_WIFO_FI]	ARCS Wide or ARCS Focus, full range, fill

SB18

023	[SB18_60]	SB18, LPF=60 Hz
024	[SB18_100]	SB18, LPF=100 Hz
025	[SB18_60_C]	SB18, LPF=60 Hz, cardioid pattern
026	[SB18_100_C]	SB18, LPF=100 Hz, cardioid pattern

SB118

027	[SB118_60]	SB118, LPF=60 Hz
028	[SB118_100]	SB118, LPF=100 Hz
029	[SB118_60_C]	SB118, LPF=60 Hz, cardioid pattern
030	[SB118_100_C]	SB118, LPF=100 Hz, cardioid pattern

SB15

031	[SB15_100]	SB15, LPF=100 Hz
032	[SB15_100_C]	SB15, LPF=100 Hz, cardioid pattern

KILO

033	[KILO]	Kilo, LPF=100 Hz
-----	--------	------------------

12XTA

034	[12XTA_FI]	12XT active, full range, fill
035	[12XTA_FI_100]	12XT active, HPF=100 Hz, fill
036	[12XTA_FR]	12XT active, full range, FOH
037	[12XTA_FR_100]	12XT active, HPF=100 Hz, FOH
038	[12XTA_MO]	12XT active, full range, monitor
039	[12XTA_MO_100]	12XT active, HPF=100 Hz, monitor

12XTP

040	[12XTP_FI]	12XT passive, full range, fill
041	[12XTP_FI_100]	12XT passive, HPF=100 Hz, fill
042	[12XTP_FR]	12XT passive, full range, FOH
043	[12XTP_FR_100]	12XT passive, HPF=100 Hz, FOH
044	[12XTP_MO]	12XT passive, full range, monitor
045	[12XTP_MO_100]	12XT passive, HPF=100 Hz, monitor

8XT

046	[8XT_FI]	8XT, full range, fill
047	[8XT_FI_100]	8XT, HPF=100 Hz, fill
048	[8XT_FR]	8XT, full range, FOH
049	[8XT_FR_100]	8XT, HPF=100 Hz, FOH
050	[8XT_MO]	8XT, full range, monitor
051	[8XT_MO_100]	8XT, HPF=100 Hz, monitor

5XT

052	[5XT]	5XT, full range
-----	-------	-----------------

115XT

053	[115XT_FI]	115XT, full range, fill
054	[115XT_FI_100]	115XT, HPF=100 Hz, fill
055	[115XT_FR]	115XT, full range, FOH
056	[115XT_FR_100]	115XT, HPF=100 Hz, FOH
057	[115XT_MO]	115XT, full range, monitor
058	[115XT_MO_100]	115XT, HPF=100 Hz, monitor

MTD115bA

059	[115bA_FI]	MTD115b active, full range, fill
060	[115bA_FI_100]	MTD115b active, HPF=100 Hz, fill
061	[115bA_FR]	MTD115b active, full range, FOH
062	[115bA_FR_100]	MTD115b active, HPF=100 Hz, FOH
063	[115bA_MO]	MTD115b active, full range, monitor
064	[115bA_MO_100]	MTD115b active, HPF=100 Hz, monitor

MTD115bP

065	[115bP_FI]	MTD115b passive, full range, fill
066	[115bP_FI_100]	MTD115b passive, HPF=100 Hz, fill
067	[115bP_FR]	MTD115b passive, full range, FOH
068	[115bP_FR_100]	MTD115b passive, HPF=100 Hz, FOH
069	[115bP_MO]	MTD115b passive, full range, monitor
070	[115bP_MO_100]	MTD115b passive, HPF=100 Hz, monitor

112XT

071	[112XT_FI]	112XT, full range, fill
072	[112XT_FI_100]	112XT, HPF=100 Hz, fill
073	[112XT_FR]	112XT, full range, FOH
074	[112XT_FR_100]	112XT, HPF=100 Hz, FOH
075	[112XT_MO]	112XT, full range, monitor
076	[112XT_MO_100]	112XT, HPF=100 Hz, monitor

MTD112b

077	[112b_FI]	MTD112b, full range, fill
078	[112b_FI_100]	MTD112b, HPF=100 Hz, fill
079	[112b_FR]	MTD112b, full range, FOH
080	[112b_FR_100]	MTD112b, HPF=100 Hz, FOH
081	[112b_MO]	MTD112b, full range, monitor
082	[112b_MO_100]	MTD112b, HPF=100 Hz, monitor

MTD108a

083	[108a_FI]	MTD108a, full range, fill
084	[108a_FI_100]	MTD108a, HPF=100 Hz, fill
085	[108a_FR]	MTD108a, full range, FOH
086	[108a_FR_100]	MTD108a, HPF=100 Hz, FOH
087	[108a_MO]	MTD108a, full range, monitor
088	[108a_MO_100]	MTD108a, HPF=100 Hz, monitor

FLAT

089	[FLAT_LA4]	Flat EQ, protection minimizing clipping risks
-----	------------	---

LA4X preset library

The LA4X onboard preset library is stored in the factory memory locations 011 to 071 of the controller (the memory locations 001 to 010 are dedicated to the storage of presets modified by the user). Each preset family is described in the tables below, including the presets memory location number, name, and description.

LA4X Preset Library 5.5(.1)

K2

011	[K2_70]	K2, full range, 70° adjustable fins settings
012	[K2_90]	K2, full range, 90° adjustable fins settings
013	[K2_110]	K2, full range, 110° adjustable fins settings

KUDO

014	[KUDO50_25]	Kudo, HPF=25 Hz, 50° K-Louver settings
015	[KUDO50_40]	Kudo, HPF=40 Hz, 50° K-Louver settings
016	[KUDO50_60]	Kudo, HPF=60 Hz, 50° K-Louver settings
017	[KUDO80_25]	Kudo, HPF=25 Hz, 80° K-Louver settings
018	[KUDO80_40]	Kudo, HPF=40 Hz, 80° K-Louver settings
019	[KUDO80_60]	Kudo, HPF=60 Hz, 80° K-Louver settings
020	[KUDO110_25]	Kudo, HPF=25 Hz, 110° K-Louver settings
021	[KUDO110_40]	Kudo, HPF=40 Hz, 110° K-Louver settings
022	[KUDO110_60]	Kudo, HPF=60 Hz, 110° K-Louver settings

KARA

023	[KARA]	Kara, full range, FOH
024	[KARA_FI]	Kara, HPF=100 Hz, fill
025	[KARADOWNK1]	Kara, HPF=100 Hz, optimized delay for K1 downfill

KIVA

026	[KIVA]	Kiva, full range, FOH
027	[KIVA_FI]	Kiva, full range, fill

SB15KIVA

028	[KIVA_SB15]	Kiva & SB15m, X-OVER=100 Hz, full range, FOH
-----	-------------	--

KILOKIVA

029	[KIVA_KILO]	Kiva & Kilo, full range, X-OVER=100 Hz, FOH
-----	-------------	---

ARCS_II

030	[ARCS_II]	ARCS II, full range
-----	-----------	---------------------

ARCS_WF

031	[ARCS_WIFO]	ARCS Wide or ARCS Focus, full range, FOH
032	[ARCS_WIFO_FI]	ARCS Wide or ARCS Focus, full range, fill

SB18

033	[SB18_60]	SB18, LPF=60 Hz
034	[SB18_100]	SB18, LPF=100 Hz
035	[SB18_60_C]	SB18, LPF=60 Hz, cardioid pattern
036	[SB18_100_C]	SB18, LPF=100 Hz, cardioid pattern

SB15

037	[SB15_100]	SB15, LPF=100 Hz
038	[SB15_100_C]	SB15, LPF=100 Hz, cardioid pattern

KILO

039	[KILO]	Kilo, LPF=100 Hz
-----	--------	------------------

X15HiQ

040	[X15]	X15 HiQ, full range
041	[X15_MO]	X15 HiQ, full range, monitor, low latency

X12

042	[X12]	X12, full range
043	[X12_MO]	X12, full range, monitor, low latency

X8

044	[X8]	X8, full range
045	[X8_MO]	X8, full range, monitor, low latency

115XTHiQ

046	[HiQ_FI]	115XT HiQ, full range, fill
047	[HiQ_FI_100]	115XT HiQ, HPF=100 Hz, fill
048	[HiQ_FR]	115XT HiQ, full range, FOH
049	[HiQ_FR_100]	115XT HiQ, HPF=100 Hz, FOH
050	[HiQ_MO]	115XT HiQ, full range, monitor
051	[HiQ_MO_100]	115XT HiQ, HPF=100 Hz, monitor

12XTA

052	[12XTA_FI]	12XT active, full range, fill
053	[12XTA_FI_100]	12XT active, HPF=100 Hz, fill
054	[12XTA_FR]	12XT active, full range, FOH
055	[12XTA_FR_100]	12XT active, HPF=100 Hz, FOH
056	[12XTA_MO]	12XT active, full range, monitor
057	[12XTA_MO_100]	12XT active, HPF=100 Hz, monitor

12XTP

058	[12XTP_FI]	12XT passive, full range, fill
059	[12XTP_FI_100]	12XT passive, HPF=100 Hz, fill
060	[12XTP_FR]	12XT passive, full range, FOH
061	[12XTP_FR_100]	12XT passive, HPF=100 Hz, FOH
062	[12XTP_MO]	12XT passive, full range, monitor
063	[12XTP_MO_100]	12XT passive, HPF=100 Hz, monitor

8XT

064	[8XT_FI]	8XT, full range, fill
065	[8XT_FI_100]	8XT, HPF=100 Hz, fill
066	[8XT_FR]	8XT, full range, FOH
067	[8XT_FR_100]	8XT, HPF=100 Hz, FOH
068	[8XT_MO]	8XT, full range, monitor
069	[8XT_MO_100]	8XT, HPF=100 Hz, monitor

5XT

070	[5XT]	5XT, full range
-----	-------	-----------------

FLAT

071	[FLAT_LA4X]	Flat EQ, protection minimizing clipping risks
-----	-------------	---

LA8 preset library

The LA8 onboard preset library is stored in the factory memory locations 011 to 147 of the controller (the memory locations 001 to 010 are dedicated to the storage of presets modified by the user). Each preset family is described in the tables below, including the presets memory location number, name, and description.

LA8 Preset Library 5.5.(1)

K1

011	[K1]	K1, full range
-----	------	----------------

K2

012	[K2 70]	K2, full range, 70° adjustable fins settings
013	[K2 90]	K2, full range, 90° adjustable fins settings
014	[K2 110]	K2, full range, 110° adjustable fins settings

K1-SB

015	[K1SB_60]	K1-SB, LPF=60 Hz, optimized for CONTOUR configuration
016	[K1SB_X]	K1-SB, LPF=200 Hz, optimized for THROW configuration with K1
017	[K1SB_X K2]	K1-SB, LPF=200 Hz, optimized for THROW configuration with K2

V-DOSC

018	[V-DOSC_LO]	V-DOSC, full range, LO contour
019	[V-DOSC_LO_60]	V-DOSC, HPF=60 Hz, LO contour
020	[V-DOSC_LO_X]	V-DOSC, full range, LO contour, optimized for [SB218_X] & [dV-S_X] presets
021	[V-DOSC_HI]	V-DOSC, full range, HI contour
022	[V-DOSC_HI_60]	V-DOSC, HPF=60 Hz, HI contour
023	[V-DOSC_HI_X]	V-DOSC, full range, HI contour, optimized for [SB218_X] & [dV-S_X] presets

KUDO

024	[KUDO50_25]	Kudo, HPF=25 Hz, 50° K-Louver settings
025	[KUDO50_40]	Kudo, HPF=40 Hz, 50° K-Louver settings
026	[KUDO50_60]	Kudo, HPF=60 Hz, 50° K-Louver settings
027	[KUDO80_25]	Kudo, HPF=25 Hz, 80° K-Louver settings
028	[KUDO80_40]	Kudo, HPF=40 Hz, 80° K-Louver settings
029	[KUDO80_60]	Kudo, HPF=60 Hz, 80° K-Louver settings
030	[KUDO110_25]	Kudo, HPF=25 Hz, 110° K-Louver settings
031	[KUDO110_40]	Kudo, HPF=40 Hz, 110° K-Louver settings
032	[KUDO110_60]	Kudo, HPF=60 Hz, 110° K-Louver settings

KARA

033	[KARA]	Kara, full range, FOH
034	[KARA_FI]	Kara, HPF=100 Hz, fill
035	[KARADOWNK1]	Kara, HPF=100 Hz, optimized delay for K1 downfill

dV-DOSC

036	[dV_FI]	dV-DOSC, HPF=100 Hz, fill
037	[dV_LO]	dV-DOSC, full range, LO contour
038	[dV_LO_100]	dV-DOSC, HPF=100 Hz, LO contour
039	[dV_HI]	dV-DOSC, full range, HI contour
040	[dV_HI_100]	dV-DOSC, HPF=100 Hz, HI contour

dV-D_dVS

041	[dV_dV-S_LO]	dV-DOSC & dV-SUB, X-OVER=100 Hz, LO contour
042	[dV_dV-S_HI]	dV-DOSC & dV-SUB, X-OVER=100 Hz, HI contour
043	[dV_dV-S_LO60]	dV-DOSC & dV-SUB, HPF=60 Hz, X-OVER=100 Hz, LO contour
044	[dV_dV-S_HI60]	dV-DOSC & dV-SUB, HPF=60 Hz, X-OVER=100 Hz, HI contour

dV-SUB

045	[dV-S_60_100]	dV-SUB, HPF=60 Hz, LPF=100 Hz
046	[dV-S_100]	dV-SUB, LPF=100 Hz
047	[dV-S_60_X]	dV-SUB, HPF=60 Hz, LPF=200 Hz, optimized for [V-DOSC_xx_60] presets
048	[dV-S_X]	dV-SUB, LPF=200 Hz, optimized for [V-DOSC_xx_X] presets

ARCS_II

049	[ARCS II]	ARCS II, full range
-----	-----------	---------------------

ARCS

050	[ARCS_LO]	ARCS, full range, LO contour
051	[ARCS_LO_60]	ARCS, HPF=60 Hz, LO contour
052	[ARCS_LO_100]	ARCS, HPF=100 Hz, LO contour
053	[ARCS_HI]	ARCS, full range, HI contour
054	[ARCS_HI_60]	ARCS, HPF=60 Hz, HI contour
055	[ARCS_HI_100]	ARCS, HPF=100 Hz, HI contour

ARCS_WF

056	[ARCS_WIFO]	ARCS Wide or ARCS Focus, full range, FOH
057	[ARCS_WIFO_FI]	ARCS Wide or ARCS Focus, full range, fill

SB28

058	[SB28_60]	SB28, LPF=60 Hz
059	[SB28_100]	SB28, LPF=100 Hz
060	[SB28_60_C]	SB28, LPF=60 Hz, cardioid pattern
061	[SB28_100_C]	SB28, LPF=100 Hz, cardioid pattern

SB218

062	[SB218_60]	SB218, LPF=60 Hz
063	[SB218_100]	SB218, LPF=100 Hz
064	[SB218_X]	SB218, LPF=200 Hz, optimized for [V-DOSC_xx_X] presets

SB18

065	[SB18_60]	SB18, LPF=60 Hz
066	[SB18_100]	SB18, LPF=100 Hz
067	[SB18_60_C]	SB18, LPF=60 Hz, cardioid pattern
068	[SB18_100_C]	SB18, LPF=100 Hz, cardioid pattern

SB118

069	[SB118_60]	SB118, LPF=60 Hz
070	[SB118_100]	SB118, LPF=100 Hz
071	[SB118_60_C]	SB118, LPF=60 Hz, cardioid pattern
072	[SB118_100_C]	SB118, LPF=100 Hz, cardioid pattern

SB15

073	[SB15_100]	SB15, LPF=100 Hz
074	[SB15_100_C]	SB15, LPF=100 Hz, cardioid pattern

KILO

075	[KILO]	Kilo, LPF=100 Hz
-----	--------	------------------

KIVA

076	[KIVA]	Kiva, full range, FOH
077	[KIVA_FI]	Kiva, full range, fill

SB15KIVA

078	[KIVA_SB15]	Kiva & SB15m, X-OVER=100 Hz, full range, FOH
-----	-------------	--

KILOKIVA

079	[KIVA_KILO]	Kiva & Kilo, full range, X-OVER=100 Hz, FOH
-----	-------------	---

X15HiQ

080	[X15]	X15 HiQ, full range
081	[X15_MO]	X15 HiQ, full range, monitor, low latency

X12

082	[X12]	X12, full range
083	[X12_MO]	X12, full range, monitor, low latency

X8

084	[X8]	X8, full range
085	[X8_MO]	X8, full range, monitor, low latency

115XTHiQ

086	[HiQ_FI]	115XT HiQ, full range, fill
087	[HiQ_FI_100]	115XT HiQ, HPF=100 Hz, fill
088	[HiQ_FR]	115XT HiQ, full range, FOH
089	[HiQ_FR_100]	115XT HiQ, HPF=100 Hz, FOH
090	[HiQ_MO]	115XT HiQ, full range, monitor
091	[HiQ_MO_100]	115XT HiQ, HPF=100 Hz, monitor

12XTA

092	[12XTA_FI]	12XT active, full range, fill
093	[12XTA_FI_100]	12XT active, HPF=100 Hz, fill
094	[12XTA_FR]	12XT active, full range, FOH
095	[12XTA_FR_100]	12XT active, HPF=100 Hz, FOH
096	[12XTA_MO]	12XT active, full range, monitor
097	[12XTA_MO_100]	12XT active, HPF=100 Hz, monitor

12XTP

098	[12XTP_FI]	12XT passive, full range, fill
099	[12XTP_FI_100]	12XT passive, HPF=100 Hz, fill
100	[12XTP_FR]	12XT passive, full range, FOH
101	[12XTP_FR_100]	12XT passive, HPF=100 Hz, FOH
102	[12XTP_MO]	12XT passive, full range, monitor
103	[12XTP_MO_100]	12XT passive, HPF=100 Hz, monitor

8XT

104	[8XT_FI]	8XT, full range, fill
105	[8XT_FI_100]	8XT, HPF=100 Hz, fill
106	[8XT_FR]	8XT, full range, FOH
107	[8XT_FR_100]	8XT, HPF=100 Hz, FOH
108	[8XT_MO]	8XT, full range, monitor
109	[8XT_MO_100]	8XT, HPF=100 Hz, monitor

5XT

110	[5XT]	5XT, full range
-----	-------	-----------------

115XT

111	[115XT_FI]	115XT, full range, fill
112	[115XT_FI_100]	115XT, HPF=100 Hz, fill
113	[115XT_FR]	115XT, full range, FOH
114	[115XT_FR_100]	115XT, HPF=100 Hz, FOH
115	[115XT_MO]	115XT, full range, monitor
116	[115XT_MO_100]	115XT, HPF=100 Hz, monitor

MTD115bA

117	[115bA_FI]	MTD115b active, full range, fill
118	[115bA_FI_100]	MTD115b active, HPF=100 Hz, fill
119	[115bA_FR]	MTD115b active, full range, FOH
120	[115bA_FR_100]	MTD115b active, HPF=100 Hz, FOH
121	[115bA_MO]	MTD115b active, full range, monitor
122	[115bA_MO_100]	MTD115b active, HPF=100 Hz, monitor

MTD115bP

123	[115bP_FI]	MTD115b passive, full range, fill
124	[115bP_FI_100]	MTD115b passive, HPF=100 Hz, fill
125	[115bP_FR]	MTD115b passive, full range, FOH
126	[115bP_FR_100]	MTD115b passive, HPF=100 Hz, FOH
127	[115bP_MO]	MTD115b passive, full range, monitor
128	[115bP_MO_100]	MTD115b passive, HPF=100 Hz, monitor

112XT

129	[112XT_FI]	112XT, full range, fill
130	[112XT_FI_100]	112XT, HPF=100 Hz, fill
131	[112XT_FR]	112XT, full range, FOH
132	[112XT_FR_100]	112XT, HPF=100 Hz, FOH
133	[112XT_MO]	112XT, full range, monitor
134	[112XT_MO_100]	112XT, HPF=100 Hz, monitor

MTD112b

135	[112b_FI]	MTD112b, full range, fill
136	[112b_FI_100]	MTD112b, HPF=100 Hz, fill
137	[112b_FR]	MTD112b, full range, FOH
138	[112b_FR_100]	MTD112b, HPF=100 Hz, FOH
139	[112b_MO]	MTD112b, full range, monitor
140	[112b_MO_100]	MTD112b, HPF=100 Hz, monitor

MTD108a

141	[108a_FI]	MTD108a, full range, fill
142	[108a_FI_100]	MTD108a, HPF=100 Hz, fill
143	[108a_FR]	MTD108a, full range, FOH
144	[108a_FR_100]	MTD108a, HPF=100 Hz, FOH
145	[108a_MO]	MTD108a, full range, monitor
146	[108a_MO_100]	MTD108a, HPF=100 Hz, monitor

FLAT

147	[FLAT_LA8]	Flat EQ, protection minimizing clipping risks
-----	------------	---

LA12X preset library

The LA12X onboard preset library is stored in the factory memory locations 011 to 072 of the controller (the memory locations 001 to 010 are dedicated to the storage of presets modified by the user). Each preset family is described in the tables below, including the presets memory location number, name, and description.

LA12X Preset Library 5.5(.1)

K1

011	[K1]	K1, full range
-----	------	----------------

K2

012	[K2 70]	K2, full range, 70° adjustable fins settings
013	[K2 90]	K2, full range, 90° adjustable fins settings
014	[K2 110]	K2, full range, 110° adjustable fins settings

K1-SB

015	[K1SB_60]	K1-SB, LPF=60 Hz, optimized for CONTOUR configuration
016	[K1SB_X]	K1-SB, LPF=200 Hz, optimized for THROW configuration with K1
017	[K1SB_X K2]	K1-SB, LPF=200 Hz, optimized for THROW configuration with K2

KARA

018	[KARA]	Kara, full range, FOH
019	[KARA_FI]	Kara, HPF=100 Hz, fill
020	[KARADOWNK1]	Kara, HPF=100 Hz, optimized delay for K1 downfill

ARCS_II

021	[ARCS II]	ARCS II, full range
-----	-----------	---------------------

ARCS_WF

022	[ARCS_WIFO]	ARCS Wide or ARCS Focus, full range, FOH
023	[ARCS_WIFO_FI]	ARCS Wide or ARCS Focus, full range, fill

KS28

024	[KS28_60]	KS28, LPF=60 Hz
025	[KS28_100]	KS28, LPF=100 Hz
026	[KS28_60_C]	KS28, LPF=60 Hz, cardioid pattern
027	[KS28_100_C]	KS28, LPF=100 Hz, cardioid pattern

SB28

028	[SB28_60]	SB28, LPF=60 Hz
029	[SB28_100]	SB28, LPF=100 Hz
030	[SB28_60_C]	SB28, LPF=60 Hz, cardioid pattern
031	[SB28_100_C]	SB28, LPF=100 Hz, cardioid pattern

SB18

032	[SB18_60]	SB18, LPF=60 Hz
033	[SB18_100]	SB18, LPF=100 Hz
034	[SB18_60_C]	SB18, LPF=60 Hz, cardioid pattern
035	[SB18_100_C]	SB18, LPF=100 Hz, cardioid pattern

SB15

036	[SB15_100]	SB15, LPF=100 Hz
037	[SB15_100_C]	SB15, LPF=100 Hz, cardioid pattern

KIVA

038	[KIVA]	Kiva, full range, FOH
039	[KIVA_FI]	Kiva, full range, fill

SB15KIVA

040	[KIVA_SB15]	Kiva & SB15m, X-OVER=100 Hz, full range, FOH
-----	-------------	--

X15HiQ

041	[X15]	X15 HiQ, full range
042	[X15_MO]	X15 HiQ, full range, monitor, low latency

X12

043	[X12]	X12, full range
044	[X12_MO]	X12, full range, monitor, low latency

X8

045	[X8]	X8, full range
046	[X8_MO]	X8, full range, monitor, low latency

115XTHiQ

047	[HiQ_FI]	115XT HiQ, full range, fill
048	[HiQ_FI_100]	115XT HiQ, HPF=100 Hz, fill
049	[HiQ_FR]	115XT HiQ, full range, FOH
050	[HiQ_FR_100]	115XT HiQ, HPF=100 Hz, FOH
051	[HiQ_MO]	115XT HiQ, full range, monitor
052	[HiQ_MO_100]	115XT HiQ, HPF=100 Hz, monitor

12XTA

053	[12XTA_FI]	12XT active, full range, fill
054	[12XTA_FI_100]	12XT active, HPF=100 Hz, fill
055	[12XTA_FR]	12XT active, full range, FOH
056	[12XTA_FR_100]	12XT active, HPF=100 Hz, FOH
057	[12XTA_MO]	12XT active, full range, monitor
058	[12XTA_MO_100]	12XT active, HPF=100 Hz, monitor

12XTP

059	[12XTP_FI]	12XT passive, full range, fill
060	[12XTP_FI_100]	12XT passive, HPF=100 Hz, fill
061	[12XTP_FR]	12XT passive, full range, FOH
062	[12XTP_FR_100]	12XT passive, HPF=100 Hz, FOH
063	[12XTP_MO]	12XT passive, full range, monitor
064	[12XTP_MO_100]	12XT passive, HPF=100 Hz, monitor

8XT

065	[8XT_FI]	8XT, full range, fill
066	[8XT_FI_100]	8XT, HPF=100 Hz, fill
067	[8XT_FR]	8XT, full range, FOH
068	[8XT_FR_100]	8XT, HPF=100 Hz, FOH
069	[8XT_MO]	8XT, full range, monitor
070	[8XT_MO_100]	8XT, HPF=100 Hz, monitor

5XT

071	[5XT]	5XT, full range
-----	-------	-----------------

FLAT

072	[FLAT_LA12X]	Flat EQ, protection minimizing clipping risks
-----	--------------	---

FLAT presets

! The transducer connected to an output channel of a FLAT preset is not protected by L-DRIVE.

The only active limitation allows minimizing clipping risks to protect the amplifier.

When driving a third party loudspeaker enclosure, it is then recommended to use an external DSP device with a preset specifically designed for this model.

With a FLAT preset, an input signal is amplified and directly routed to output without any modification of the frequency response. All the output parameters are accessible (Mute, Gain, Delay, Polarity, and Routing).

Using the [FLAT_xxxx] preset with LA4 or LA4X provides 6 dB of headroom. Using the [FLAT_LA8] preset with LA8 provides 8 dB of headroom. Using [FLAT_LA12X] preset with LA12X provides 9.5 dB of headroom.

[FLAT_xxxx]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN B	0 dB	0 ms	+	ON
OUT 4	PA	IN B	0 dB	0 ms	+	ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

Variable Curvature WST systems presets

The factory presets dedicated to variable curvature WST line sources are optimized for long throw applications. In the following sections, tables describe the loudspeaker configurations and the factory presets for each system. Discriminant acoustic properties of each loudspeaker configuration are given, such as -10 dB bandwidth or LF limit, frequency response contour, or directivity specificity.

K1



Compatibility issues

[K1], [KARADOWNK1] and [K2 xxx] presets from versions 4.x and later of the preset library are not compatible with [K1] and [KARADOWNK1] from versions of the preset library prior to 4.0.

Compatibility issues may occur when working from a Session file with units using older presets. Use the same version of the preset library for all units within a single line source.

loudspeaker configuration	preset(s)			acoustic properties
	K1	K1-SB	KS28 or SB28*	
K1 line source	[K1]	—	—	35 Hz – 20 kHz
K1 / K1-SB line source (K1-SB on top)	[K1]	[K1SB_X]	—	enhanced LF throw
K1 line source + coupled K1-SB subwoofers (beside or behind)	[K1]	[K1SB_60]	—	down to 30 Hz reinforced LF contour LF rejection (side polarized or rear cardioid)
K1 line source + subwoofers	[K1]	—	[xx28_60]	down to 25 Hz reinforced LF contour

* with subwoofers as a cardioid array, use [xx28_60_C]

i Downfill options for additional vertical coverage

K2 enclosures driven by [K2_110]

Kara enclosures driven by [KARADOWNK1]

[K1] and [K2 xxx]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
left LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
right LF	OUT 2	LF					ON
MF	OUT 3	MF					ON
HF	OUT 4	HF					ON



left/right when looking at the front face of the enclosure

[K1SB_X] and [K1SB_60]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON

[KARADOWNK1]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 2	HF					ON
LF	OUT 3	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 4	HF					ON

i The factory parameters already include optimal delay value for the coupling of a K1 line source with KARA as a downfill.

i Routing, gain, delay, polarity and mute parameters can be modified by the user.

K2

loudspeaker configuration	preset(s)			acoustic properties
	K2	K1-SB	KS28 or SB28 *	
K2 line source	[K2 xxx]	—	—	35 Hz – 20 kHz adjustable horizontal directivity
K2 / K1-SB line source (K1-SB on top)	[K2 xxx]	[K1SB_X K2]	—	enhanced LF throw
K2 line source + coupled K1-SB subwoofers (on top, beside or behind)	[K2 xxx]	[K1SB_60]	—	down to 30 Hz reinforced LF contour LF rejection (side polarized or rear cardioid)
K2 line source + subwoofers	[K2 xxx]	—	[xx28_60]	down to 25 Hz reinforced LF contour

* with subwoofers as a cardioid array, use [xx28_60_C]

K2 adjustable fins and presets

Always ensure that the K2 adjustable fins are set in accordance with the selected preset:

[K2 70]: 70°, [K2 90]: 90°, [K2 110]: 110°

Refer to the K2 user manual for details.

[K2 xxx]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
left LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
right LF	OUT 2	LF					ON
MF	OUT 3	MF					ON
HF	OUT 4	HF					ON



left/right when looking at the front face of the enclosure

[K1SB_X K2] and [K1SB_60]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

Kudo

loudspeaker configuration	preset(s)		acoustic properties
	Kudo	KS28 or SB28 * ou SB18 *	
Kudo line source	[KUDOxx_25]	—	35 Hz – 20 kHz
	[KUDOxx_40]		40 Hz – 20 kHz
	[KUDOxx_60]		60 Hz – 20 kHz
Kudo line source + subwoofer	[KUDOxx_40]	[xxxx_60_C]	down to 25 Hz (KS28 and SB28) or 32 Hz (SB18) reinforced LF contour

* with subwoofers as a cardioid array, use [xxxx_xx_C]

K-LOUVER and presets

Always ensure that the K-LOUVER panels are set in accordance with the selected preset:

[KUDO50_xx]: 50°, [KUDO80_xx]: 80°, [KUDO110_xx]: 110°

Refer to the Kudo user manual for details.

[KUDOxx_xx]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
left LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
right LF	OUT 2	LF					ON
MF	OUT 3	MF					ON
HF	OUT 4	HF					ON



left/right when looking at the front face of the enclosure



Routing, gain, delay, polarity and mute parameters can be modified by the user.

Kara



Kara and Kara(i) are different versions of the same enclosure. They share the same factory presets and recommended loudspeaker configurations.

loudspeaker configuration	preset(s)		acoustic properties
	Kara	KS28, SB28 or SB18 *	
Kara line source	[KARA]	—	55 Hz – 20 kHz
Kara line source + coupled subwoofer	[KARA]	[xxxx_100]	down to 32 Hz (SB18) or 25 Hz (KS28 or SB28) reinforced LF contour
Kara line source + separated subwoofer	[KARA]	[xxxx_60]	
single or pair of Kara enclosures	[KARA_FI]	—	high-pass at 100 Hz flat response

* with subwoofers as a cardioid array, use [xxxx_xx_C]

[KARA]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 2	HF					ON
LF	OUT 3	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 4	HF					ON

[KARA_FI]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 2	HF					ON
LF	OUT 3	LF	IN B	0 dB	0 ms	+	ON
HF	OUT 4	HF					ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

Kiva SB15m

loudspeaker configuration	preset(s)		acoustic properties
	Kiva	SB15m*	
Kiva line source	[KIVA]	—	80 Hz – 20 kHz
Kiva line source + coupled SB15m	[KIVA_SB15]		down to 40 Hz
	[KIVA]	[SB15_100]	reinforced LF contour
single or pair of Kiva enclosures	[KIVA_FI]	—	80 Hz – 20 kHz flat response
pair of Kiva enclosures + coupled SB15m	[KIVA_FI]	[SB15_100]	down to 40 Hz reinforced LF contour

* with SB subwoofers as a cardioid array, use [SBxx_xx_C]

[KIVA]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN A	0 dB	0 ms	+	ON
OUT 4	PA	IN A	0 dB	0 ms	+	ON

[KIVA_FI]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN B	0 dB	0 ms	+	ON
OUT 4	PA	IN B	0 dB	0 ms	+	ON

[KIVA_SB15]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
SB15m	OUT 1	LF	IN A	0 dB	0 ms	+	ON
KIVA	OUT 2	PA					ON
KIVA	OUT 3	PA					ON
KIVA	OUT 4	PA					ON

 Hybrid preset combining [KIVA] with [SB15_100], pre-alignment delay included.

 Routing, gain, delay, polarity and mute parameters can be modified by the user.

Kiva Kilo

loudspeaker configuration	preset(s)			acoustic properties
	Kiva	Kilo	SB18*	
Kiva line source	[KIVA]	—	—	80 Hz – 20 kHz
Kiva line source + coupled Kilo	[KIVA_KILO]	—	—	down to 50 Hz
Kiva line source + coupled Kilo + SB18	[KIVA_KILO]	[SB18_60]	—	down to 32 Hz reinforced LF contour
single or pair of Kiva enclosures	[KIVA_FI]	—	—	80 Hz – 20 kHz flat response

* with SB subwoofers as a cardioid array, use [SBxx_xx_C]

[KIVA]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN A	0 dB	0 ms	+	ON
OUT 4	PA	IN A	0 dB	0 ms	+	ON

[KIVA_FI]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN B	0 dB	0 ms	+	ON
OUT 4	PA	IN B	0 dB	0 ms	+	ON

[KIVA_KILO]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
KILO	OUT 1	LF	IN A	0 dB	0 ms	+	ON
KIVA	OUT 2	PA					ON
KIVA	OUT 3	PA					ON
KIVA	OUT 4	PA					ON



Hybrid preset combining [KIVA] with [KILO], pre-alignment delay included.

[KILO]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

V-DOSC

loudspeaker configuration	preset(s)				acoustic properties
	V-DOSC*	dV-SUB	KS28 / SB28 / SB218 **	dV-DOSC	
V-DOSC line source	[V-DOSC_LO] or [V-DOSC_HI]	—	—	—	40 Hz — 20 kHz
V-DOSC line source + coupled dV-SUB	[V-DOSC_xx_X]	[dV-S_X]	—	—	down to 35 Hz reinforced LF contour
V-DOSC line source + KS28 / SB28	[V-DOSC_xx_60]	—	[xx28_60]	—	down to 25 Hz reinforced LF contour
V-DOSC line source + coupled SB218	[V-DOSC_xx_X]	—	[SB218_X]	—	
V-DOSC line source + coupled dV-SUB + KS28 / SB28	[V-DOSC_xx_60]	[dV-S_60_X]	[xx28_60]	—	down to 25 Hz reinforced LF contour additional LF resources
V-DOSC line source + coupled dV-DOSC	[V-DOSC_xx]	—	—	[dV_xx_100]	downfill coverage

* standard HF contour with [xx_LO] or increased HF contour with [xx_HI]

** with subwoofers as a cardioid array, use [xxxx_xx_C]

[V-DOSC_LO], [V-DOSC_HI], [V-DOSC_xx_60] and [V-DOSC_xx_X]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
left LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
right LF	OUT 2	LF					ON
MF	OUT 3	MF					ON
HF	OUT 4	HF					ON



left/right when looking at the front face of the enclosure

[dV-S_X], [dV-S_60_X], and [SB218_X]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

dV-DOSC

loudspeaker configuration	preset(s)			acoustic properties
	dV-DOSC*	dV-SUB	KS28, SB218, SB28, SB18 or SB118**	
dV-DOSC line source	[dV_LO] or [dV_HI]	—	—	65 Hz – 20 kHz
dV-DOSC line source + coupled dV-SUB	[dV_dV-S_xx]		—	down to 35 Hz reinforced LF contour
	[dV_xx_100]	[dV-S_100]	—	
dV-DOSC line source + coupled subwoofer	[dV_xx_100]	—	[xxxx_100]	down to 32 Hz (SB18 / SB118) or 25 Hz (KS28 / SB28 / SB218)
dV-DOSC line source + coupled dV-SUB + coupled subwoofer	[dV_dV-S_xx60]		[xxxx_60]	
	[dV_xx_100]	[dV-S_60_100]	—	
single or pair of dV-DOSC enclosures	[dV_FL]	—	—	high-pass at 100 Hz flat response

* standard HF contour with [xx_LO] or increased HF contour with [xx_HI]

** with subwoofers as a cardioid array, use [xxxx_xx_C]

[dV_LO], [dV_HI], [dV_xx_60] and [dV_xx_100]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 2	HF					ON
LF	OUT 3	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 4	HF					ON

[dV_FL]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 2	HF					ON
LF	OUT 3	LF	IN B	0 dB	0 ms	+	ON
HF	OUT 4	HF					ON

[dV-S_100] and [dV-S_60_100]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON

[dV_dV-S_HI], [dV_dV-S_HI60], [dV_dV-S_LO] and [dV_dV-S_LO60]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
dV-SUB	OUT 1	SB	IN A	0 dB	0 ms	+	ON
dV-SUB	OUT 2	SB	IN A	0 dB	0 ms	+	ON
dV-DOSC LF	OUT 3	LF	IN B	0 dB	0 ms	+	ON
dV-DOSC HF	OUT 4	HF					ON

i [dV_dV-S_xx] are hybrid presets combining [dV_LO_100] or [dV_HI_100] with [dV-S_100], pre-alignment delay included.

[dV_dV-S_xx60] are hybrid presets combining [dV_LO_100] or [dV_HI_100] with [dV-S_60_100], pre-alignment delay included.

i Routing, gain, delay, polarity and mute parameters can be modified by the user.

Constant Curvature WST systems presets

The factory presets dedicated to constant curvature WST line sources are optimized for medium throw applications.

In the following sections, tables describe the loudspeaker configurations and the factory presets for each system.

Discriminant acoustic properties of each loudspeaker configuration are given, such as -10 dB bandwidth or LF limit, or frequency response contour.

ARCS II

loudspeaker configuration	preset(s)		acoustic properties
	ARCS II	KS28 or SB28*	
ARCS II line source	[ARCS II]	—	50 Hz - 20 kHz
ARCS II line source + subwoofer	[ARCS II]	[xx28_60]	down to 25 Hz reinforced LF contour

* with subwoofers as a cardioid array, use [xxxx_xx_C]

[ARCS II]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 2	HF					ON
LF	OUT 3	LF	IN B	0 dB	0 ms	+	ON
HF	OUT 4	HF					ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

ARCS Wide / ARCS Focus

loudspeaker configuration	preset(s)		acoustic properties
	ARCS Wide / ARCS Focus	SB18*	
WiFo line source	[ARCS_WIFO]	—	55 Hz — 20 kHz
WiFo line source + SB18	[ARCS_WIFO]	[SB18_60]	down to 32 Hz reinforced LF contour
single WiFo enclosure	[ARCS_WIFO_FI]	—	55 Hz — 20 kHz flat response
single WiFo enclosure + SB18m	[ARCS_WIFO_FI]	[SB18_60]	down to 32 Hz reinforced LF contour

* with SB subwoofers as a cardioid array, use [SBxx_xx_C]

[ARCS_WIFO] and [ARCS_WIFO_FI]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN B	0 dB	0 ms	+	ON
OUT 4	PA	IN B	0 dB	0 ms	+	ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

ARCS

loudspeaker configuration	preset(s)		acoustic properties
	ARCS*	SB18/SB118 or KS28/SB28/SB218**	
ARCS line source	[ARCS_LO] or [ARCS_HI]	—	50 Hz — 20 kHz
ARCS line source + subwoofer	[ARCS_xx_60]	[xxxx_60]	down to 32 Hz (SB18/SB118) or 25 Hz (KS28 / SB28 / SB218) reinforced LF contour
ARCS line source + coupled subwoofer	[ARCS_xx_100]	[xxxx_100]	

* standard HF contour with [xx_LO] or increased HF contour with [xx_HI]

** with subwoofers as a cardioid array, use [xxxx_xx_C]

[ARCS_LO], [ARCS_HI], [ARCS_xx_60] and [ARCS_xx_100]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 2	HF					ON
LF	OUT 3	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 4	HF					ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

Coaxial loudspeaker enclosures presets

The factory presets dedicated to coaxial enclosures are optimized for short throw applications. In the following sections, tables describe the loudspeaker configurations and the factory presets for each system. Discriminant acoustic properties of each loudspeaker configuration are given, such as -10 dB bandwidth or LF limit, or frequency response contour.

X15 HiQ

X15 HiQ is an active coaxial loudspeaker enclosure.

loudspeaker configuration	preset(s)		acoustic properties
	X15 HiQ	SB18*	
X15 HiQ	[X15]	—	55 Hz - 20 kHz
	[X15_MO]	—	52 Hz - 20 kHz low latency
X15 HiQ + SB18	[X15]	[SB18_100]	down to 32 Hz reinforced LF contour
	[X15_MO]		down to 32 Hz reinforced LF contour low latency

* with SB subwoofers as a cardioid array, use [SB18_100_C]

! [xx_MO] presets for the X series use the amplified controller low latency operating mode. When used along with subwoofers, it is recommended to use the subwoofers in low latency operating mode. To achieve this, create custom presets combining low latency channel sets and subwoofer channel sets.

If the subwoofers are driven from a dedicated amplified controller using a subwoofer factory preset, they are operated in normal latency mode. Therefore, an additional delay should be set to the [xx_MO] low latency channels to align them: 2.65 ms on LA8 or 3.08 ms on LA4X and LA12X.

[X15] and [X15_MO]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 2	HF					ON
LF	OUT 3	LF	IN B	0 dB	0 ms	+	ON
HF	OUT 4	HF					ON

[SB18_100]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON

[SB18_100_C]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
SR	OUT 1	SR	IN A	0 dB	0 ms	+	ON
SB	OUT 2	SB					ON
SB	OUT 3	SB					ON
SB	OUT 4	SB					ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

X12

X12 is a passive coaxial loudspeaker enclosure.

loudspeaker configuration	preset(s)		acoustic properties
	X12	SB15m or SB18*	
X12	[X12]	—	59 Hz - 20 kHz
	[X12_MO]	—	57 Hz - 20 kHz low latency
X12 + subwoofer	[X12]	[SBxx_100]	down to 40 Hz (SB15m) or 32 Hz (SB18) reinforced LF contour
	[X12_MO]		down to 40 Hz (SB15m) or 32 Hz (SB18) reinforced LF contour low latency

* with SB subwoofers as a cardioid array, use [SBxx_100_C]

! [xx_MO] presets for the X series use the amplified controller low latency operating mode. When used along with subwoofers, it is recommended to use the subwoofers in low latency operating mode. To achieve this, create custom presets combining low latency channel sets and subwoofer channel sets.

If the subwoofers are driven from a dedicated amplified controller using a subwoofer factory preset, they are operated in normal latency mode. Therefore, an additional delay should be set to the [xx_MO] low latency channels to align them: 2.65 ms on LA8 or 3.08 ms on LA4X and LA12X.

[X12] and [X12_MO]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN B	0 dB	0 ms	+	ON
OUT 4	PA	IN B	0 dB	0 ms	+	ON

[SBxx_100]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON

[SBxx_100_C]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
SR	OUT 1	SR	IN A	0 dB	0 ms	+	ON
SB	OUT 2	SB					ON
SB	OUT 3	SB					ON
SB	OUT 4	SB					ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

X8

X8 is a passive coaxial loudspeaker enclosure.

loudspeaker configuration	preset(s)		acoustic properties
	X8	SB15m*	
X8	[X8]	—	60 Hz - 20 kHz
	[X8_MO]	—	55 Hz - 20 kHz low latency
X8 + SB15m	[X8]	[SB15_100]	down to 40 Hz reinforced LF contour
	[X8_MO]		down to 40 Hz reinforced LF contour low latency

* with SB subwoofers as a cardioid array, use [SB15_100_C]

! [xx_MO] presets for the X series use the amplified controller low latency operating mode. When used along with subwoofers, it is recommended to use the subwoofers in low latency operating mode. To achieve this, create custom presets combining low latency channel sets and subwoofer channel sets.

If the subwoofers are driven from a dedicated amplified controller using a subwoofer factory preset, they are operated in normal latency mode. Therefore, an additional delay should be set to the [xx_MO] low latency channels to align them: 2.65 ms on LA8 or 3.08 ms on LA4X and LA12X.

[X8] and [X8_MO]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN B	0 dB	0 ms	+	ON
OUT 4	PA	IN B	0 dB	0 ms	+	ON

[SBxx_100]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON

[SBxx_100_C]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
SR	OUT 1	SR	IN A	0 dB	0 ms	+	ON
SB	OUT 2	SB					ON
SB	OUT 3	SB					ON
SB	OUT 4	SB					ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

5XT

5XT is a passive coaxial loudspeaker enclosure.

loudspeaker configuration	preset(s)		acoustic properties
	5XT	SB15m*	
5XT	[5XT]	—	95 Hz - 20 kHz
5XT + SB15m	[5XT]	[SB15_100]	down to 40 Hz reinforced LF contour

* with SB subwoofers as a cardioid array, use [SBxx_xx_C]

[5XT]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN B	0 dB	0 ms	+	ON
OUT 4	PA	IN B	0 dB	0 ms	+	ON

[SB15_100]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

8XT, 12XTP, MTD108a, MTD112b and MTD115bP

8XT, 12XTP, MTD108a, MTD112b and MTD115bP are passive coaxial loudspeaker enclosures.

Preset names

passive coaxial loudspeaker enclosure	preset
8XT	[8XT_xx]
12XT (in passive mode)	[12XTP_xx]
MTD108a	[108a_xx]
MTD112b	[112b_xx]
MTD115b (in passive mode)	[115bP_xx]

loudspeaker configuration	preset(s)		acoustic properties	
	passive xxx	SB15m, SB18* or SB118*		
coaxial	[xxx_FR], [xxx_FI] or [xxx_MO]	—	nominal bandwidth	choice between ** 3 contours
coaxial + coupled SB subwoofer	[xxx_xx_100]	[SBxx_100]	down to 40 Hz (SB15m) or 32 Hz (SB18/SB118) reinforced LF contour	

* with SB subwoofers as a cardioid array, use [SBxx_xx_C]

** [xxx_FR] for FOH application, [xxx_FI] for speech, classical music or fill, [xxx_MO] flat in half-space loading conditions (floor, wall or ceiling)

[xxx_FR], [xxx_FI], [xxx_MO] and [xxx_xx_100]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	PA	IN A	0 dB	0 ms	+	ON
OUT 2	PA	IN A	0 dB	0 ms	+	ON
OUT 3	PA	IN B	0 dB	0 ms	+	ON
OUT 4	PA	IN B	0 dB	0 ms	+	ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

12XTA, 115XT, 115XT HiQ and MTD115bA

12XTA, 115XT, 115XT HiQ and MTD115bA are active coaxial loudspeaker enclosures.

Preset names

active coaxial loudspeaker enclosure	preset
12XT (in active mode)	[12XTA_xx]
115XT HiQ	[HiQ_xx]
MTD115b (in active mode)	[115bA_xx]
115XT	[115XT_xx]

loudspeaker configuration	preset(s)		acoustic properties	
	active xxx	SB18 or SB118*		
coaxial	[xxx_FR], [xxx_FI] or [xxx_MO]	—	nominal bandwidth	choice between 3 contours**
coaxial + coupled SB subwoofer	[xxx_xx_100]	[SBxx_100]	down to 32 Hz reinforced LF contour	

* with SB subwoofers as a cardioid array, use [SBxx_xx_C]

** [xxx_FR] for FOH application, [xxx_FI] for speech, classical music or fill, [xxx_MO] flat in half-space loading conditions (floor, wall or ceiling)

[xxx_FR], [xxx_FI], [xxx_MO] and [xxx_xx_100]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
HF	OUT 2	HF					ON
LF	OUT 3	LF	IN B	0 dB	0 ms	+	ON
HF	OUT 4	HF					ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

Subwoofer loudspeaker enclosures presets

In this section, tables describe the loudspeaker configurations for L-Acoustics versatile subwoofers, and the corresponding factory presets. Discriminant acoustic properties of each loudspeaker configuration are given, such as -10 dB bandwidth or LF limit, or directivity specificity.

subwoofer	presets	optimal compatibility
SB15m	[SB15_100] or [SB15_100_C]	Coupled Kiva, XT, X12, X8
SB18(i) SB18m	[SB18_60] or [SB18_60_C]	Kudo, Kara, Kiva/Kilo, ARCS, ARCS Wide, ARCS Focus
	[SB18_100] or [SB18_100_C]	Kara, ARCS, XT, X series
SB118	[SB118_60] or [SB118_60_C]	Kudo, dV-DOSC/dV-SUB, Kiva/Kilo, ARCS
	[SB118_100] or [SB118_100_C]	dV-DOSC, ARCS, XT, coupled MTD
SB28	[SB28_60] or [SB28_60_C]	K1, K2, V-DOSC, Kudo, dV-DOSC/dV-SUB, Kara/SB18, ARCS, ARCSII
	[SB28_100] or [SB28_100_C]	dV-DOSC, Kara, coupled ARCS
KS28	[KS28_60] or [KS28_60_C]	K1, K2, V-DOSC, Kudo, dV-DOSC/dV-SUB, Kara/SB18, ARCS, ARCSII
	[KS28_100] or [KS28_100_C]	dV-DOSC, Kara, coupled ARCS
KS28	[KS28_60] or [KS28_60_C]	K1, K2, V-DOSC, Kudo, dV-DOSC/dV-SUB, Kara/SB18, ARCS, ARCSII
	[KS28_100] or [KS28_100_C]	dV-DOSC, Kara, coupled ARCS
SB218	[SB218_60]	V-DOSC, Kudo, dV-DOSC/dV-SUB, ARCS
	[SB218_100]	dV-DOSC, coupled ARCS

loudspeaker configuration*	preset**	acoustic properties
standard	[xxxx_60] or [xxxx_100]	down to 40 Hz (SB15m), 32 Hz (SB18 / SB118) or 25 Hz (KS28 / SB28 / SB218)
cardioid	[xxxx_60_C] or [xxxx_100_C]	down to 40 Hz (SB15m), 32 Hz (SB18 / SB118) or 25 Hz (KS28 / SB28) cardioid directivity pattern

* refer to the subwoofer user manual for the recommended deployment patterns in each configuration

** SB218 is exclusively driven by LA8 and LA12X amplified controllers. KS28 is exclusively driven by LA12X amplified controllers.

[xxxx_60] or [xxxx_100]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON

[xxxx_60_C] or [xxxx_100_C]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
SR	OUT 1	SR	IN A	0 dB	0 ms	+	ON
SB	OUT 2	SB					ON
SB	OUT 3	SB					ON
SB	OUT 4	SB					ON



Routing, gain, delay, polarity and mute parameters can be modified by the user.

Pre-alignement delay values

Time alignment from geometric measurements

When combining several loudspeaker systems, it is important to adjust their delay values to optimize acoustic summation. If no acoustic measurement tool is available, it is possible to use the pre-alignement delay values given in the tables on this section.


Pre-alignement delays have been measured with the enclosures at the same geometric location, front face on the same plane.

After adding these values to the factory presets, time-alignment is then obtained by adding the geometric delay to the closest system. The geometric delay is calculated from the path difference between a reference listening point and the center of each system.

Laser rangefinders

The L-Acoustics Tech Toolcase includes two laser devices that can be used for geometric measurements: TruPulse™ 200 (trademark of Laser Technology, Inc.) and Leica DISTO™ D3 (trademark Leica Geosystems).

line source + separated subwoofer

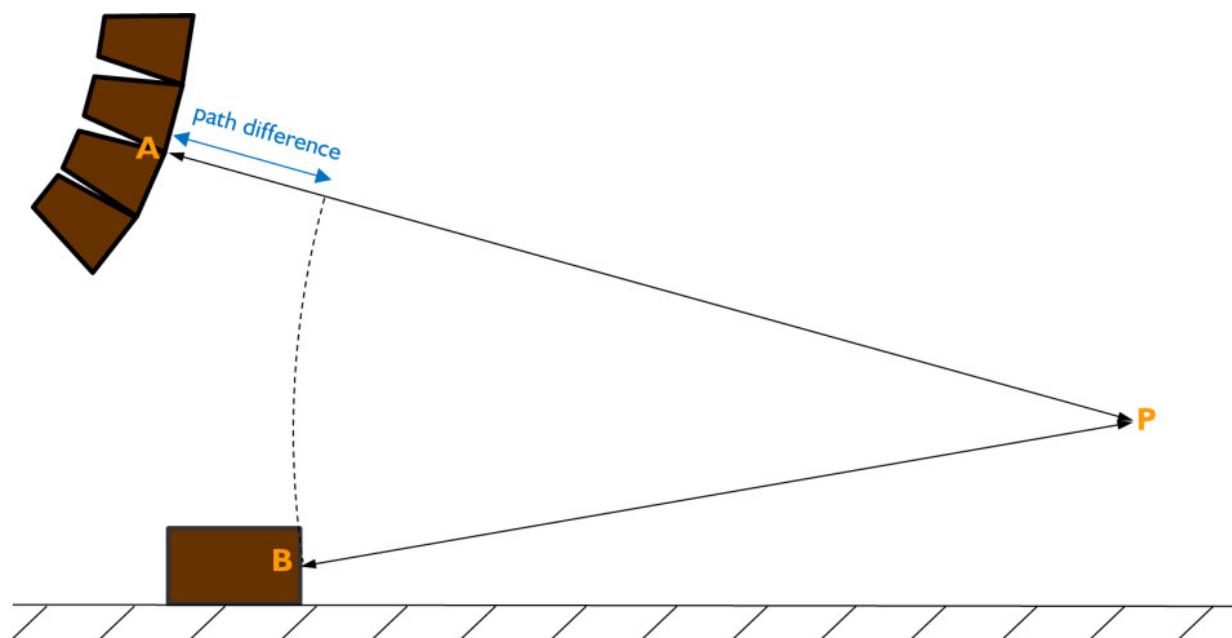

Procedure

1. Measure the path difference: PA - PB, with:

P: reference listening point

A: center of the further system, named system a

B: center of the closest system, named system b

2. Calculate the Geometric delay(s): Path difference (m) / Sound velocity (m.s^{-1}), with:

sound velocity $\approx 340 \text{ m.s}^{-1}$ at 20°C and in dry air

3. Refer to the tables of this section to find the **Pre-alignement delay a** and the **Pre-alignement delay b**, corresponding to the system a + system b combination.

4. Add the Alignment delay to the factory preset of each system. Being the closest to the reference listening point, the geometric delay must be added to the system b only:

a) alignment delay (ms) for system a = **Pre-alignement delay a** (ms)

b) alignment delay (ms) for system b = **Pre-alignement delay b** (ms) + Geometric delay (ms)

Normalization: If $\neq 0$, subtract **Pre-alignement delay a** to both Alignment delay values.

Variable curvature WST systems

K1 + K1-SB

presets	pre-alignment delay values	
[K1] + [K1SB_X]	K1 = 0 ms	K1-SB = 0 ms
[K1] + [K1SB_60]	K1 = 6 ms	K1-SB = 0 ms

K1 + SB28

presets	pre-alignment delay values	
[K1] + [SB28_60]	K1 = 0 ms	SB28 = 6 ms
[K1] + [SB28_60_C]	K1 = 0 ms	SB28 = 0.5 ms

K1 + KS28

presets	pre-alignment delay values	
[K1] + [KS28_60]	K1 = 0 ms	KS28 = 6 ms
[K1] + [KS28_60_C]	K1 = 0 ms	KS28 = 0.5 ms

K1 + K1-SB + SB28

presets	pre-alignment delay values		
[K1] + [K1SB_X] + [SB28_60]	K1 = 0 ms	K1-SB = 0 ms	SB28 = 6 ms
[K1] + [K1SB_X] + [SB28_60_C]	K1 = 0 ms	K1-SB = 0 ms	SB28 = 0.5 ms
[K1] + [K1SB_60] + [SB28_60]	K1 = 8 ms	K1-SB = 2 ms	SB28 = 0 ms
[K1] + [K1SB_60] + [SB28_60_C]	K1 = 13.5 ms	K1-SB = 7.5 ms	SB28 = 0 ms

K1 + K1-SB + KS28

presets	pre-alignment delay values		
[K1] + [K1SB_X] + [KS28_60]	K1 = 0 ms	K1-SB = 0 ms	KS28 = 6 ms
[K1] + [K1SB_X] + [KS28_60_C]	K1 = 0 ms	K1-SB = 0 ms	KS28 = 0.5 ms
[K1] + [K1SB_60] + [KS28_60]	K1 = 8 ms	K1-SB = 2 ms	KS28 = 0 ms
[K1] + [K1SB_60] + [KS28_60_C]	K1 = 13.5 ms	K1-SB = 7.5 ms	KS28 = 0 ms

K2 + K1-SB

presets	pre-alignment delay values	
[K2] + [K1SB_X K2]	K2 = 0 ms	K1-SB = 0 ms
[K2] + [K1SB_60]	K2 = 6 ms	K1-SB = 0 ms

K2 + SB28

presets	pre-alignment delay values	
[K2] + [SB28_60]	K2 = 0 ms	SB28 = 6 ms
[K2] + [SB28_60_C]	K2 = 0 ms	SB28 = 0.5 ms

K2 + KS28

presets	pre-alignment delay values	
[K2] + [KS28_60]	K2 = 0 ms	KS28 = 6 ms
[K2] + [KS28_60_C]	K2 = 0 ms	KS28 = 0.5 ms

K2 + K1-SB + SB28

presets	pre-alignment delay values		
[K2] + [K1SB_X K2] +	K2 = 0 ms	K1-SB = 0 ms	SB28 = 6 ms
[K2] + [K1SB_X K2] + [SB28_60_C]	K2 = 0 ms	K1-SB = 0 ms	SB28 = 0.5 ms
[K2] + [K1SB_60] + [SB28_60]	K2 = 8 ms	K1-SB = 2 ms	SB28 = 0 ms
[K2] + [K1SB_60] + [SB28_60_C]	K2 = 13.5 ms	K1-SB = 7.5 ms	SB28 = 0 ms

K2 + K1-SB + KS28

presets	pre-alignment delay values		
[K2] + [K1SB_X K2] + [KS28_60]	K2 = 0 ms	K1-SB = 0 ms	KS28 = 6 ms
[K2] + [K1SB_X K2] + [KS28_60_C]	K2 = 0 ms	K1-SB = 0 ms	KS28 = 0.5 ms
[K2] + [K1SB_60] + [KS28_60]	K2 = 8 ms	K1-SB = 2 ms	KS28 = 0 ms
[K2] + [K1SB_60] + [KS28_60_C]	K2 = 13.5 ms	K1-SB = 7.5 ms	KS28 = 0 ms

Kudo + SB118

presets	pre-alignment delay values	
[KUDOxx_60] + [SB118_60]	Kudo = 0 ms	SB118 = 3.5 ms
[KUDOxx_60] + [SB118_60_C]	Kudo = 2 ms	SB118 = 0 ms

Kudo + SB18

presets	pre-alignment delay values	
[KUDOxx_60] + [SB18_60]	Kudo = 0 ms	SB18 = 3.9 ms
[KUDOxx_60] + [SB18_60_C]	Kudo = 1.6 ms	SB18 = 0 ms

Kudo + SB218

presets	pre-alignment delay values	
[KUDOxx_60] + [SB218_60]	Kudo = 0 ms	SB218 = 5 ms

Kudo + SB28

presets	pre-alignment delay values	
[KUDOxx_60] + [SB28_60]	Kudo = 0 ms	SB28 = 5 ms
[KUDOxx_60] + [SB28_60_C]	Kudo = 0.5 ms	SB28 = 0 ms

Kudo + KS28

presets	pre-alignment delay values	
[KUDOxx_60] + [KS28_60]	Kudo = 0 ms	KS28 = 5 ms
[KUDOxx_60] + [KS28_60_C]	Kudo = 0.5 ms	KS28 = 0 ms

Kara + SB18

presets	pre-alignment delay values	
[KARA] + [SB18_100]	Kara = 0 ms	SB18 = 0 ms
[KARA_FI] + [SB18_100]	Kara = 3.0 ms	SB18 = 0 ms
[KARA] + [SB18_100_C]	Kara = 5.5 ms	SB18 = 0 ms
[KARA_FI] + [SB18_100_C]	Kara = 8.5 ms	SB18 = 0 ms
[KARA] + [SB18_60]	Kara = 2.5 ms	SB18 = 0 ms
[KARA] + [SB18_60_C]	Kara = 8 ms	SB18 = 0 ms

Kara + SB28

presets	pre-alignment delay values	
[KARA] + [SB28_100]	Kara = 0 ms	SB28 = 1.35 ms
[KARA] + [SB28_100_C]	Kara = 4.2 ms	SB28 = 0 ms
[KARA] + [SB28_60]	Kara = 0.3 ms	SB28 = 0 ms
[KARA] + [SB28_60_C]	Kara = 5.9 ms	SB28 = 0 ms

Kara + KS28

presets	pre-alignment delay values	
[KARA] + [KS28_100]	Kara = 0 ms	KS28 = 1.35 ms
[KARA] + [KS28_100_C]	Kara = 4.2 ms	KS28 = 0 ms
[KARA] + [KS28_60]	Kara = 0.3 ms	KS28 = 0 ms
[KARA] + [KS28_60_C]	Kara = 5.9 ms	KS28 = 0 ms

Kara + SB18 + SB28

presets	pre-alignment delay values		
[KARA] + [SB18_100] + [SB28_60]	Kara = 0 ms	SB18 = 0 ms	SB28 = 1.3 ms
[KARA] + [SB18_100] + [SB28_60_C]	Kara = 4.2 ms	SB18 = 4.2 ms	SB28 = 0 ms

Kara + SB18 + KS28

presets	pre-alignment delay values		
[KARA] + [SB18_100] + [KS28_60]	Kara = 0 ms	SB18 = 0 ms	KS28 = 1.3 ms
[KARA] + [SB18_100] + [KS28_60_C]	Kara = 4.2 ms	SB18 = 4.2 ms	KS28 = 0 ms

Kiva + Kilo

presets	pre-alignment delay values	
[KIVA] + [KILO]	Kiva = 0 ms	Kilo = 1.5 ms

Kiva/Kilo + SB118

presets	pre-alignment delay values	
[KIVA_KILO] + [SB118_60]	Kiva/Kilo = 0 ms	SB118 = 5.9 ms
[KIVA_KILO] + [SB118_60_C]	Kiva/Kilo = 0 ms	SB118 = 0.4 ms

Kiva/Kilo + SB18

presets	pre-alignment delay values	
[KIVA_KILO] + [SB18_60]	Kiva/Kilo = 0 ms	SB18 = 6.3 ms
[KIVA_KILO] + [SB18_60_C]	Kiva/Kilo = 0 ms	SB18 = 0.8 ms

Kiva + SB15m

presets	pre-alignment delay values	
[KIVA] + [SB15_100]	Kiva = 0 ms	SB15m = 1.4 ms
[KIVA] + [SB15_100_C]	Kiva = 2.4 ms	SB15m = 0 ms
[KIVA_FI] + [SB15_100]	Kiva = 0 ms	SB15m = 0.6 ms

Kiva/SB15m + SB18

presets	pre-alignment delay values	
[KIVA_SB15] + [SB18_60]	Kiva/SB15m = 0 ms	SB18 = 8.5 ms
[KIVA_SB15] + [SB18_60_C]	Kiva/SB15m = 0 ms	SB18 = 3 ms

V-DOSC + SB218

presets	pre-alignment delay values	
[V-DOSC_xx_X] + [SB218_X]	V-DOSC = 1.8 ms	SB218 = 0 ms
[V-DOSC_xx_60] + [SB218_60]	V-DOSC = 0 ms	SB218 = 3.8 ms

V-DOSC + SB28

presets	pre-alignment delay values	
[V-DOSC_xx_60] + [SB28_60]	V-DOSC = 0 ms	SB28 = 3.8 ms
[V-DOSC_xx_60] + [SB28_60_C]	V-DOSC = 1.7 ms	SB28 = 0 ms

V-DOSC + KS28

presets	pre-alignment delay values	
[V-DOSC_xx_60] + [KS28_60]	V-DOSC = 0 ms	KS28 = 3.8 ms
[V-DOSC_xx_60] + [KS28_60_C]	V-DOSC = 1.7 ms	KS28 = 0 ms

V-DOSC + dV-SUB

presets	pre-alignment delay values	
[V-DOSC_xx_X] + [dV-S_X]	V-DOSC = 0 ms	dV-SUB = 0.2 ms

V-DOSC + dV-SUB + SB218

presets	pre-alignment delay values		
[V-DOSC_xx_60] + [dV-S_60_X] + [SB218_60]	V-DOSC = 0 ms	dV-SUB = 0.2 ms	SB218 = 3.7 ms

V-DOSC + dV-SUB + SB28

presets	pre-alignment delay values		
[V-DOSC_xx_60] + [dV-S_60_X] + [SB28_60]	V-DOSC = 0 ms	dV-SUB = 0.2 ms	SB28 = 3.7 ms
[V-DOSC_xx_60] + [dV-S_60_X] + [SB28_60_C]	V-DOSC = 1.9 ms	dV-SUB = 2 ms	SB28 = 0 ms

V-DOSC + dV-SUB + KS28

presets	pre-alignment delay values		
[V-DOSC_xx_60] + [dV-S_60_X] + [KS28_60]	V-DOSC = 0 ms	dV-SUB = 0.2 ms	KS28 = 3.7 ms
[V-DOSC_xx_60] + [dV-S_60_X] + [KS28_60_C]	V-DOSC = 1.9 ms	dV-SUB = 2 ms	KS28 = 0 ms

V-DOSC + dV-DOSC

presets	pre-alignment delay values	
[V-DOSC_xx_60] + [dV_xx_100]	V-DOSC = 0 ms	dV-DOSC = 0 ms

V-DOSC + dV-DOSC downfill

presets	pre-alignment delay values	
[V-DOSC_xx_60] + [dV_xx_100]	V-DOSC = 0 ms	dV-DOSC = 0.04 ms

dV-DOSC + SB118

presets	pre-alignment delay values	
[dV_xx_100] + [SB118_100]	dV = 2.7 ms	SB118 = 0 ms
[dV_xx_100] + [SB118_100_C]	dV = 8.3 ms	SB118 = 0 ms

dV-DOSC + SB218

presets	pre-alignment delay values	
[dV_xx_100] + [SB218_100]	dV = 0.8 ms	SB218 = 0 ms

dV-DOSC + SB18

presets	pre-alignment delay values	
[dV_xx_100] + [SB18_100]	dV = 2.4 ms	SB18 = 0 ms
[dV_xx_100] + [SB18_100_C]	dV = 8 ms	SB18 = 0 ms

dV-DOSC + SB28

presets	pre-alignment delay values	
[dV_xx_100] + [SB28_100]	dV = 0.8 ms	SB28 = 0 ms
[dV_xx_100] + [SB28_100_C]	dV = 6.3 ms	SB28 = 0 ms

dV-DOSC + KS28

presets	pre-alignment delay values	
[dV_xx_100] + [KS28_100]	dV = 0.8 ms	KS28 = 0 ms
[dV_xx_100] + [KS28_100_C]	dV = 6.3 ms	KS28 = 0 ms

dV-DOSC + dV-SUB

presets	pre-alignment delay values	
[dV_xx_100] + [dV-S_100]	dV = 0 ms	dV-SUB = 0 ms

dV-DOSC + dV-SUB + SB118

presets	pre-alignment delay values		
[dV_xx_100] + [dV-S_60_100] + [SB118_60]	dV = 0 ms	dV-SUB = 0.75 ms	SB118 = 4 ms
[dV_xx_100] + [dV-S_60_100] + [SB118_60_C]	dV = 1.5 ms	dV-SUB = 2.25 ms	SB118 = 0 ms

dV-DOSC + dV-SUB + SB218

presets	pre-alignment delay values		
[dV_xx_100] + [dV-S_60_100] + [SB218_60]	dV = 0 ms	dV-SUB = 0.75 ms	SB218 = 4.5 ms

dV-DOSC + dV-SUB + SB18

presets	pre-alignment delay values		
[dV_xx_100] + [dV-S_60_100] + [SB18_60]	dV = 0 ms	dV-SUB = 0.75 ms	SB18 = 4.4 ms
[dV_xx_100] + [dV-S_60_100] + [SB18_60_C]	dV = 1.1 ms	dV-SUB = 1.85 ms	SB18 = 0 ms

dV-DOSC + dV-SUB + SB28

presets	pre-alignment delay values		
[dV_xx_100] + [dV-S_60_100] + [SB28_60]	dV = 0 ms	dV-SUB = 0.75 ms	SB28 = 4.5 ms
[dV_xx_100] + [dV-S_60_100] + [SB28_60_C]	dV = 1 ms	dV-SUB = 1.75 ms	SB28 = 0 ms

dV-DOSC + dV-SUB + KS28

presets	pre-alignment delay values		
[dV_xx_100] + [dV-S_60_100] + [KS28_60]	dV = 0 ms	dV-SUB = 0.75 ms	KS28 = 4.5 ms
[dV_xx_100] + [dV-S_60_100] + [KS28_60_C]	dV = 1 ms	dV-SUB = 1.75 ms	KS28 = 0 ms

Constant curvature WST systems

ARCS + SB118

presets	pre-alignment delay values	
[ARCS_xx_60] + [SB118_60]	ARCS = 0.8 ms	SB118 = 0 ms
[ARCS_xx_60] + [SB118_60_C]	ARCS = 6.3 ms	SB118 = 0 ms
[ARCS_xx_100] + [SB118_100]	ARCS = 1.4 ms	SB118 = 0 ms
[ARCS_xx_100] + [SB118_100_C]	ARCS = 6.9 ms	SB118 = 0 ms

ARCS + SB18

presets	pre-alignment delay values	
[ARCS_xx_60] + [SB18_60]	ARCS = 0.4 ms	SB18 = 0 ms
[ARCS_xx_60] + [SB18_60_C]	ARCS = 5.9 ms	SB18 = 0 ms
[ARCS_xx_100] + [SB18_100]	ARCS = 1.1 ms	SB18 = 0 ms
[ARCS_xx_100] + [SB18_100_C]	ARCS = 6.6 ms	SB18 = 0 ms

ARCS + SB218

presets	pre-alignment delay values	
[ARCS_xx_60] + [SB218_60]	ARCS = 0 ms	SB218 = 0.9 ms
[ARCS_xx_100] + [SB218_100]	ARCS = 0 ms	SB218 = 0.3 ms

ARCS + SB28

presets	pre-alignment delay values	
[ARCS_xx_60] + [SB28_60]	ARCS = 0 ms	SB28 = 0.6 ms
[ARCS_xx_60] + [SB28_60_C]	ARCS = 4.9 ms	SB28 = 0 ms
[ARCS_xx_100] + [SB28_100]	ARCS = 0 ms	SB28 = 0.5 ms
[ARCS_xx_100] + [SB28_100_C]	ARCS = 5.0 ms	SB28 = 0 ms

ARCS + KS28

presets	pre-alignment delay values	
[ARCS_xx_60] + [KS28_60]	ARCS = 0 ms	SB28 = 0.6 ms
[ARCS_xx_60] + [KS28_60_C]	ARCS = 4.9 ms	SB28 = 0 ms
[ARCS_xx_100] + [KS28_100]	ARCS = 0 ms	SB28 = 0.5 ms
[ARCS_xx_100] + [KS28_100_C]	ARCS = 5.0 ms	SB28 = 0 ms

ARCS II + SB28

presets	pre-alignment delay values	
[ARCS_II] + [SB28_60]	ARCS II = 0 ms	SB28 = 2.6 ms
[ARCS_II] + [SB28_60_C]	ARCS II = 2.9 ms	SB28 = 0 ms

ARCS II + KS28

presets	pre-alignment delay values	
[ARCS_II] + [KS28_60]	ARCS II = 0 ms	KS28 = 2.6 ms
[ARCS_II] + [KS28_60_C]	ARCS II = 2.9 ms	KS28 = 0 ms

ARCS Wide/Focus + SB18m

presets	pre-alignment delay values	
[ARCS_WIFO] or [ARCS_WIFO_FI] + [SB18_60]	ARCS Wide/Focus = 1.7 ms	SB18m = 0 ms
[ARCS_WIFO] or [ARCS_WIFO_FI] + [SB18_60_C]	ARCS Wide/Focus = 7.2 ms	SB18m = 0 ms

Coaxial loudspeaker enclosures

! [xx_MO] presets for the X series use the amplified controller low latency operating mode. When used along with subwoofers, it is recommended to use the subwoofers in low latency operating mode. To achieve this, create custom presets combining low latency channel sets and subwoofer channel sets.

If the subwoofers are driven from a dedicated amplified controller using a subwoofer factory preset, they are operated in normal latency mode. Therefore, an additional delay should be set to the [xx_MO] low latency channels to align them: 2.65 ms on LA8 or 3.08 ms on LA4X and LA12X.

X15 HiQ + SB18

presets	pre-alignment delay values	
[X15] + [SB18_100]	X15 HiQ = 0 ms	SB18 = 0 ms
[X15_MO] + [SB18_100]	X15 HiQ = 0 ms	SB18 = 0 ms

X12 + SB15m

presets	pre-alignment delay values	
[X12] + [SB15_100]	X12 = 0 ms	SB15m = 2.8 ms
[X12_MO] + [SB15_100]	X12 = 0 ms	SB15m = 2.8 ms

X12 + SB18

presets	pre-alignment delay values	
[X12] + [SB18_100]	X12 = 0 ms	SB18 = 0 ms
[X12_MO] + [SB18_100]	X12 = 0 ms	SB18 = 0 ms

X8 + SB15m

presets	pre-alignment delay values	
[X8] + [SB15_100]	X8 = 0 ms	SB15m = 2.6 ms
[X8_MO] + [SB15_100]	X8 = 0 ms	SB15m = 2.6 ms

115XT HiQ + SB118

presets	pre-alignment delay values	
[HIQ_FL_100] + [SB118_100]	HiQ = 2.6 ms	SB118 = 0 ms
[HIQ_FR_100] + [SB118_100]	HiQ = 2.6 ms	SB118 = 0 ms
[HIQ_MO_100] + [SB118_100]	HiQ = 2.5 ms	SB118 = 0 ms

115XT HiQ + SB18

presets	pre-alignment delay values	
[HIQ_FL_100] + [SB18_100]	HiQ = 2.3 ms	SB18 = 0 ms
[HIQ_FR_100] + [SB18_100]	HiQ = 2.3 ms	SB18 = 0 ms
[HIQ_MO_100] + [SB18_100]	HiQ = 2.2 ms	SB18 = 0 ms

115XT HiQ + dV-SUB

presets	pre-alignment delay values	
[HIQ_FL_100] + [dV-S_100]	HiQ = 0.6 ms	dV-SUB = 0 ms
[HIQ_FR_100] + [dV-S_100]	HiQ = 0.6 ms	dV-SUB = 0 ms
[HIQ_MO_100] + [dV-S_100]	HiQ = 0.5 ms	dV-SUB = 0 ms

Active 12XT + SB118

presets	pre-alignment delay values	
[12XTA_FL_100] + [SB118_100]	12XTA = 2.6 ms	SB118 = 0 ms
[12XTA_FR_100] + [SB118_100]	12XTA = 2.6 ms	SB118 = 0 ms
[12XTA_MO_100] + [SB118_100]	12XTA = 2.5 ms	SB118 = 0 ms

Active 12XT + SB18

presets	pre-alignment delay values	
[12XTA_FL_100] + [SB18_100]	12XTA = 2.3 ms	SB18 = 0 ms
[12XTA_FR_100] + [SB18_100]	12XTA = 2.3 ms	SB18 = 0 ms
[12XTA_MO_100] + [SB18_100]	12XTA = 2.2 ms	SB18 = 0 ms

Passive 12XT + SB118

presets	pre-alignment delay values	
[12XTP_FL_100] + [SB118_100]	12XTP = 2.4 ms	SB118 = 0 ms
[12XTP_FR_100] + [SB118_100]	12XTP = 2.4 ms	SB118 = 0 ms
[12XTP_MO_100] + [SB118_100]	12XTP = 2.4 ms	SB118 = 0 ms

Passive 12XT + SB18

presets	pre-alignment delay values	
[12XTP_FL_100] + [SB18_100]	12XTP = 2.1 ms	SB18 = 0 ms
[12XTP_FR_100] + [SB18_100]	12XTP = 2.1 ms	SB18 = 0 ms
[12XTP_MO_100] + [SB18_100]	12XTP = 2.1 ms	SB18 = 0 ms

8XT + SB118

presets	pre-alignment delay values	
[8XT_FL_100] + [SB118_100]	8XT = 3.1 ms	SB118 = 0 ms
[8XT_FR_100] + [SB118_100]	8XT = 3.2 ms	SB118 = 0 ms
[8XT_MO_100] + [SB118_100]	8XT = 3.0 ms	SB118 = 0 ms

8XT + SB18

presets	pre-alignment delay values	
[8XT_FL_100] + [SB18_100]	8XT = 2.8 ms	SB18 = 0 ms
[8XT_FR_100] + [SB18_100]	8XT = 2.9 ms	SB18 = 0 ms
[8XT_MO_100] + [SB18_100]	8XT = 2.7 ms	SB18 = 0 ms

5XT + SB15m

presets	pre-alignment delay values	
[5XT] + [SB15_100]	5XT = 0.3 ms	SB15 = 0 ms

115XT + SB118

presets	pre-alignment delay values	
[115XT_FL_100] + [SB118_100]	115XT = 2.6 ms	SB118 = 0 ms
[115XT_FR_100] + [SB118_100]	115XT = 2.5 ms	SB118 = 0 ms
[115XT_MO_100] + [SB118_100]	115XT = 2.9 ms	SB118 = 0 ms

115XT + SB18

presets	pre-alignment delay values	
[115XT_FL_100] + [SB18_100]	115XT = 2.3 ms	SB18 = 0 ms
[115XT_FR_100] + [SB18_100]	115XT = 2.2 ms	SB18 = 0 ms
[115XT_MO_100] + [SB18_100]	115XT = 2.6 ms	SB18 = 0 ms

Active MTD115 + SB118

presets	pre-alignment delay values	
[115bA_FL_100] + [SB118_100]	115bA = 2.4 ms	SB118 = 0 ms
[115bA_FR_100] + [SB118_100]	115bA = 2.5 ms	SB118 = 0 ms
[115bA_MO_100] + [SB118_100]	115bA = 2.7 ms	SB118 = 0 ms

Active MTD115 + SB18

presets	pre-alignment delay values	
[115bA_FL_100] + [SB18_100]	115bA = 2.1 ms	SB18 = 0 ms
[115bA_FR_100] + [SB18_100]	115bA = 2 ms	SB18 = 0 ms
[115bA_MO_100] + [SB18_100]	115bA = 2.4 ms	SB18 = 0 ms

Passive MTD115 + SB118

presets	pre-alignment delay values	
[115bP_FL_100] + [SB118_100]	115bP = 2.1 ms	SB118 = 0 ms
[115bP_FR_100] + [SB118_100]	115bP = 2.2 ms	SB118 = 0 ms
[115bP_MO_100] + [SB118_100]	115bP = 2.8 ms	SB118 = 0 ms

Passive MTD115 + SB18

presets	pre-alignment delay values	
[115bP_FL_100] + [SB18_100]	115bP = 1.8 ms	SB18 = 0 ms
[115bP_FR_100] + [SB18_100]	115bP = 1.9 ms	SB18 = 0 ms
[115bP_MO_100] + [SB18_100]	115bP = 2.5 ms	SB18 = 0 ms

112XT + SB118

presets	pre-alignment delay values	
[112XT_FL_100] + [SB118_100]	112XT = 2.3 ms	SB118 = 0 ms
[112XT_FR_100] + [SB118_100]	112XT = 2.3 ms	SB118 = 0 ms
[112XT_MO_100] + [SB118_100]	112XT = 2.6 ms	SB118 = 0 ms

112XT + SB18

presets	pre-alignment delay values	
[112XT_FL_100] + [SB18_100]	112XT = 2 ms	SB18 = 0 ms
[112XT_FR_100] + [SB18_100]	112XT = 2 ms	SB18 = 0 ms
[112XT_MO_100] + [SB18_100]	112XT = 2.3 ms	SB18 = 0 ms

MTD112b + SB118

presets	pre-alignment delay values	
[112b_FL_100] + [SB118_100]	112b = 2.4 ms	SB118 = 0 ms
[112b_FR_100] + [SB118_100]	112b = 2.5 ms	SB118 = 0 ms
[112b_MO_100] + [SB118_100]	112b = 3.0 ms	SB118 = 0 ms

MTD112b + SB18

presets	pre-alignment delay values	
[112b_FL_100] + [SB18_100]	112b = 2.1 ms	SB18 = 0 ms
[112b_FR_100] + [SB18_100]	112b = 2.2 ms	SB18 = 0 ms
[112b_MO_100] + [SB18_100]	112b = 2.7 ms	SB18 = 0 ms

MTD108a + SB118

presets	pre-alignment delay values	
[108a_FL_100] + [SB118_100]	108a = 3.5 ms	SB118 = 0 ms
[108a_FR_100] + [SB118_100]	108a = 3.6 ms	SB118 = 0 ms
[108a_MO_100] + [SB118_100]	108a = 4.0 ms	SB118 = 0 ms

MTD108a + SB18

presets	pre-alignment delay values	
[108a_FL_100] + [SB18_100]	108a = 3.2 ms	SB18 = 0 ms
[108a_FR_100] + [SB18_100]	108a = 3.3 ms	SB18 = 0 ms
[108a_MO_100] + [SB18_100]	108a = 3.7 ms	SB18 = 0 ms

Enclosure drive capacity per amplified controller

Enclosure drive capacity per LA4

Maximum number of coaxial enclosures per LA4

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
5XT	3	12
8XT	2	8
Active 12XT	2	4
Passive 12XT	1	4
115XT HiQ	1	2
112XT	2	4
115XT	1	2
MTD108a	2	8
MTD112b	1	4
Active MTD115b	1	2
Passive MTD115b	1	4

Maximum number of constant curvature WST enclosures per LA4

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
ARCS Wide / ARCS Focus	1	4
ARCS	1	2

Maximum number of variable curvature WST enclosures per LA4

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
Kiva / Kilo	2	8

Maximum number of subwoofer enclosures per LA4

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
SB15m	1	4
SB18	1	4
SB118	1	4

* For passive loudspeakers, the value corresponds to the number of enclosures in parallel on the output. For active loudspeakers, the value corresponds to the number of sections in parallel on the output.

Enclosure drive capacity per LA4X

Maximum number of coaxial enclosures per LA4X

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
5XT	4	16
8XT	2	8
Active 12XT	2	4
Passive 12XT	1	4
115XT HiQ	1	2
X8	2	8
X12	1	4
X15 HiQ	1	2

Maximum number of constant curvature WST enclosures per LA4X

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
ARCS Wide / ARCS Focus	1	4
ARCS II	1	2

Maximum number of variable curvature WST enclosures per LA4X

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
Kiva / Kilo	2	8
Kara	2	4
Kudo	1	1
K2	1	1

Maximum number of subwoofer enclosures per LA4X

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
SB15m	1	4
SB18	1	4

* For passive loudspeakers, the value corresponds to the number of enclosures in parallel on the output. For active loudspeakers, the value corresponds to the number of sections in parallel on the output.



For ARCS, SB118, the MTD series, 112XT and 115XT, refer to the enclosure drive capacity table for LA4.

Enclosure drive capacity per LA8

Maximum number of coaxial enclosures per LA8

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
5XT	6	24
8XT	3	12
Active 12XT	3	6
Passive 12XT	2	8
115XT HiQ	2	4
112XT	3	6
115XT	3	6
MTD108a	3	12
MTD112b	2	8
Active MTD115b	2	4
Passive MTD115b	2	8
X8	3	8
X12	2	8
X15 HiQ	2	4

Maximum number of constant curvature WST enclosures per LA8

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
ARCS Wide / ARCS Focus	2	8
ARCS II	2	4
ARCS	3	6

Maximum number of variable curvature WST enclosures per LA8

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
Kiva / Kilo	3	12
Kara	3	6
Kudo	3	3
K2	3	3
K1	2	2
K1-SB	1	4
V-DOSC	2	2
dV-DOSC	3	6

Maximum number of subwoofer enclosures per LA8

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
SB15m	2	8
SB18	2	8
SB28	1	4
SB118	2	8
SB218	1	4
dV-SUB	1	4

* For passive loudspeakers, the value corresponds to the number of enclosures in parallel on the output. For active loudspeakers, the value corresponds to the number of sections in parallel on the output.

Make sure the total number of connected enclosures does not exceed the maximum number of enclosures per controller. For example, LA8 can drive up to three X8 per output, but no more than eight per controller.

Enclosure drive capacity per LA12X

Maximum number of coaxial enclosures per LA12X

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
5XT	6	24
X8	3	12
X12	3	12
X15 HiQ	3	6
8XT	3	12
Active 12XT	3	6
Passive 12XT	3	12
115XT HiQ	3	6

Maximum number of constant curvature WST enclosures per LA12X

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
ARCS Wide / ARCS Focus	3	12
ARCS II	3	6

Maximum number of variable curvature WST enclosures per LA12X

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
Kiva	3	12
Kara	3	6
K2	3	3
K1	2	2
K1-SB	1	4

Maximum number of subwoofer enclosures per LA12X

Loudspeaker enclosure	Maximum number of connections per output*	Maximum number of enclosures per controller
SB15m	3	12
SB18	3	12
SB28	1	4
KS28	1	4

* For passive loudspeakers, the value corresponds to the number of enclosures in parallel on the output. For active loudspeakers, the value corresponds to the number of sections in parallel on the output.

i For 112XT, 115XT, the MTD series, ARCS, dV-DOSC, Kudo, V-DOSC, KILO, SB118, SB218 and dV-SUB, refer to the enclosure drive capacity table for LA8.

